

Please contact us at Rubbershox.com/contact immediately if you have any questions about installing UCSBM12344 Modular buffers on your vehicle. We are a US company located in Southern California.

(Do not Copy) UCSBM12344 is Patent Pending. This instruction is part of an installation manual that is under Copyright Protection by RubberShox®
 Note: This product gives added support for automotive coil springs to prevent sagging. It also provides a stiffer/more stable suspension that absorbs and dissipates the shock from potholes and rough roads. This product reduces stress on tires and the suspension which will prolong the vehicle's operational life span.

Required Tools List

Floor Jack x 1, Jack Stands x1, WheelBlocks x 2, Soap water, Gloves, Scissors

Package Includes

UCSBM12344 x Pair (UCSBM1 x 2, UCSBM2 x 2, UCSBM3 x 2, UCSBM4 x 4)
 Zip Ties x 2, User Manual, Thank You Card

Preparation

- For front-installation, make sure vehicle is on a hard (concrete) surface and apply the parking brake. Place blocks under rear wheels to prevent the vehicle from rolling.
- Check your vehicle owner's manual for the proper contact points then jack up each tire to its recommended servicing height. For a safe installation and equal weight distribution, position the jack stands under the contact points corresponding with each wheel.
- Once each tire is properly elevated, the coil spring is relaxed at full extension.
Tip: It's recommended that you remove the wheel for easier installation.
- Using a damp cloth, clean away all debris on your coil spring before installation. (Especially in the center of 3-4coils)
- Measure the spring spacing between the coils (See Fig.1, "D" for measuring points). Please also measure center 2-3 spring distance to get an average of the spacing distance.



Assemble the Right Size for Your Coil Spring (Ref. Table below)


Based on the coil spring gap D (Fig. 1) measurement.

For Example: If your rear coil spring gap D is 2.3", you can use UCSBM1+2+3+4= 2.2".

UCSBM1 must be included in any assembly

UCSBM Module Height

Module	Height
UCSBM1	0.2"
UCSBM2	1.1"
UCSBM3	0.63"
UCSBM4	0.31"

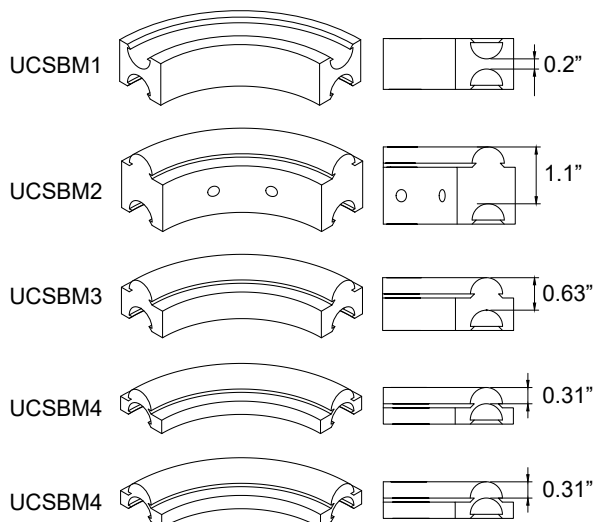

Installation

- After determining the appropriate combination of UCSBM modules to fit your coil spring height. Assemble the UCSBM modules, Except for the UCSBM1.
- Spray soap water on coil and submerge UCSBM12344 into soap water and groove of the UCSBM2, 3, or 4 and assemble them together. In the assembled example, you need to slide UCSBM2, 3, and 4 together.
- Lubricate all the coil springs and module UCSBM1 on both grooves.
- Install UCSBM1 first on top of the coil you want to install the buffer with
- Put the rest of the UCSBM modules on the bottom side of the spring, then slide both top and bottom modules in different directions to connect them together and line up on the edges.



- Use the included zip ties to tie the UCSBM buffers on top of the coil.
- Release the Jack and Stand
- To maximize support, insert 2 buffers of matching size on to one coil spring on each side.
- A test drive is suggested after installation. The ride should feel a little stiffer. Drive Safely.
- This product is primarily used to support the Coil Spring and prevent sagging. It provides a stiffer / more stable suspension that will absorb and dissipate the shock from pot holes and bad roads while reducing stress on the suspension and tires. This increases the vehicle's operational life span.
- If you require a higher ground clearance, you can add more UCSBM buffer on your coil spring or insert Rubber Block Booster from RubberShox.

